

## Fixtop A+B

### SOLID EPOXY MASTIC

Extra strong solid mastic, fast hardening, soft and easy to spread. The adhesion strength and high mechanical resistance make it ideal for safe and long-lasting bonding and lamination. Also suitable for mixed bonding.



 **EXTRA STRONG AND FAST BONDING**

 **IDEAL FOR MIXED LAMINATION AND BONDING**

 **SOFT AND EASY TO SPREAD**

#### Technical data:

- ◆ **Density at 25°C gr/cm<sup>3</sup>:** 1.4 / 1.4
- ◆ **Standard colour:** coloured
- ◆ **Appearance:** white paste

#### Approximate consumption:

- ◆ **For grouting:**  
20-30 linear meters
- ◆ **For bonding:**  
30-40 mt<sup>2</sup>

The stated duration is only approximate



Indoor  
Outdoor



Natural stone



Quartz



Ceramic

#### How to apply it:

- ◆ Remove the desired quantity of product from the container and weigh it.
- ◆ Comply with the ratio between part A and part B as indicated in the TDS.
- ◆ Use clean tools when mixing.
- ◆ If necessary, add liquid or pigment dyes before mixing with the hardener.
- ◆ Make sure that the material on which the product will be applied is clean and dry.
- ◆ To clean tools soiled with mastics, use non-greasy solvents, e.g. Acetone or Butyl Acetate. Use the necessary PPE.
- ◆ Read the technical and safety data sheet carefully.
- ◆ Close the containers with their original caps for correct storage.
- ◆ Avoid prolonged contact with air.

#### Performance:

<b>Adhesion strength [Mpa]</b>	marble 14
<b>Gel time in mass at 25°C</b>	30-40 min
<b>Workability time at 25°C</b>	24 h
<b>Extraclear</b>	no
<b>Stability to sunlight</b>	medium
<b>Wet effect</b>	medium
<b>Spreadability</b>	superb
<b>Adhesion on wet</b>	no

#### Safety measures:

Before use, please read the instructions in the safety data sheet and the notes on the packaging. Close the container after use. For professional use only.

#### Warnings:

When a surface is treated for the first time, it is advisable to evaluate its effect or adhesion on a sample or hidden corner.



Part A




Part B



Mixing



Post mix verticality

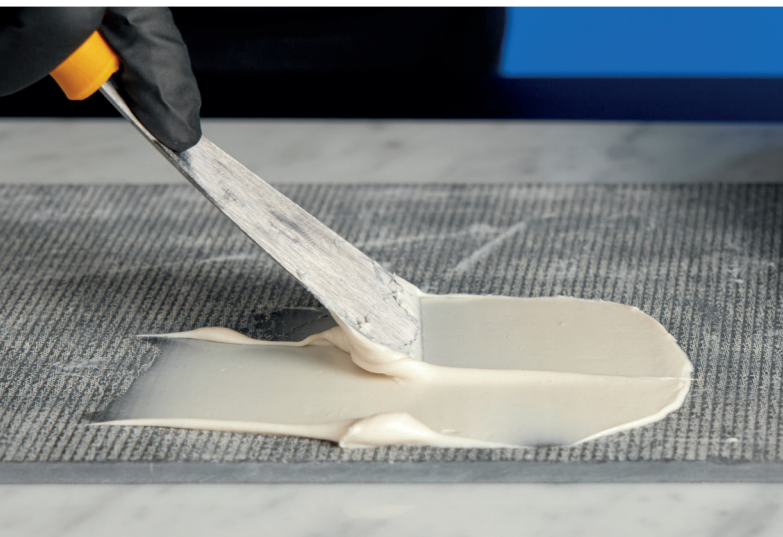

Mixed product appearance



Hardened product appearance