

Rivo A+B

SOLID EPOXY MASTIC

Very strong and fast-hardening solid mastic. The adhesion strength and rapid hardening make it ideal for safe and long-lasting bonding and lamination. Also ideal for mixed gluing.



EXTRA STRONG BONDING



FAST



IDEAL FOR MIXED LAMINATION AND BONDING

Technical data:

- ◆ **Density at 25°C gr/cm³:** 1.4 / 1.4
- ◆ **Standard colour:** coloured
- ◆ **Appearance:** white paste

Approximate consumption:

- ◆ **For grouting:**
20-30 linear meters
- ◆ **For bonding:**
30-40 mt²

The stated duration is only approximate

Indoor
Outdoor

Natural stone



Quartz



Ceramic

How to apply it:

- ◆ Remove the desired quantity of product from the container and weigh it.
- ◆ Comply with the ratio between part A and part B as indicated in the TDS.
- ◆ Use clean tools when mixing.
- ◆ If necessary, add liquid or pigment dyes before mixing with the hardener.
- ◆ Make sure that the material on which the product will be applied is clean and dry.
- ◆ To clean tools soiled with mastics, use non-greasy solvents, e.g. Acetone or Butyl Acetate. Use the necessary PPE.
- ◆ Read the technical and safety data sheet carefully.
- ◆ Close the containers with their original caps for correct storage.
- ◆ Avoid prolonged contact with air.

Performance:

Adhesion strength [Mpa]	marble 10
Gel time in mass at 25°C	15-20 min
Workability time at 25°C	24 h
Extraclear	no
Stability to sunlight	low
Wet effect	good
Spreadability	good
Adhesion on wet	no

Safety measures:

Before use, please read the instructions in the safety data sheet and the notes on the packaging. Close the container after use. For professional use only.

Warnings:

When a surface is treated for the first time, it is advisable to evaluate its effect or adhesion on a sample or hidden corner.



Part A



Part B




Mixing



Post mix verticality



Mixed product appearance

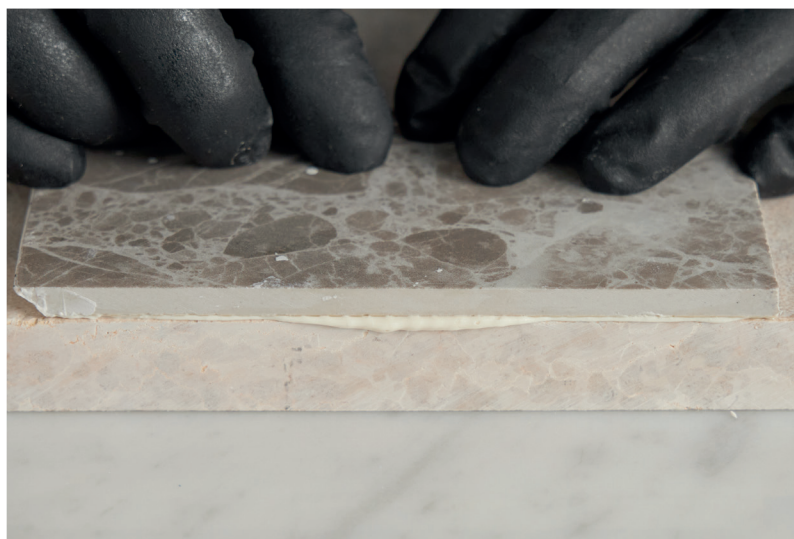

Hardened product appearance