

Strong Edge 45 A+B

TRANSPARENT SOLID EPOXY MASTIC

Transparent solid epoxy mastic with high performance in terms of bonding and hardening speed. It is the specific solution for rapid visible bonding and is particularly suitable for 45° bonding.



 **EXTRA STRONG AND FAST BONDING**

 **IDEAL FOR VISIBLE AND 45° BONDING**

 **LOW YELLOWING**

Technical data:

- ◆ **Density at 25°C gr/cm³:** 1.1 / 1.0
- ◆ **Standard colour:** transparent
- ◆ **Appearance:** transparent paste

Approximate consumption:

- ◆ **For grouting:**
20-30 linear meters
- ◆ **For bonding:**
30-40 mt²

The stated duration is only approximate



How to apply it:

- ◆ Remove the desired quantity of product from the container and weigh it.
- ◆ Comply with the ratio between part A and part B as indicated in the TDS.
- ◆ Use clean tools when mixing.
- ◆ If necessary, add liquid or pigment dyes before mixing with the hardener.
- ◆ Make sure that the material on which the product will be applied is clean and dry.
- ◆ To clean tools soiled with mastics, use non-greasy solvents, e.g. Acetone or Butyl Acetate. Use the necessary PPE.
- ◆ Read the technical and safety data sheet carefully.
- ◆ Close the containers with their original caps for correct storage.
- ◆ Avoid prolonged contact with air.

Performance:

Adhesion strength [Mpa]	marble 13
Gel time in mass at 25°C	8-13 min
Workability time at 25°C	24 h
Extraclear	no
Stability to sunlight	superb
Wet effect	medium
Spreadability	good
Adhesion on wet	no

Safety measures:

Before use, please read the instructions in the safety data sheet and the notes on the packaging. Close the container after use. For professional use only.

Warnings:


When a surface is treated for the first time, it is advisable to evaluate its effect or adhesion on a sample or hidden corner.



Part A



Part B

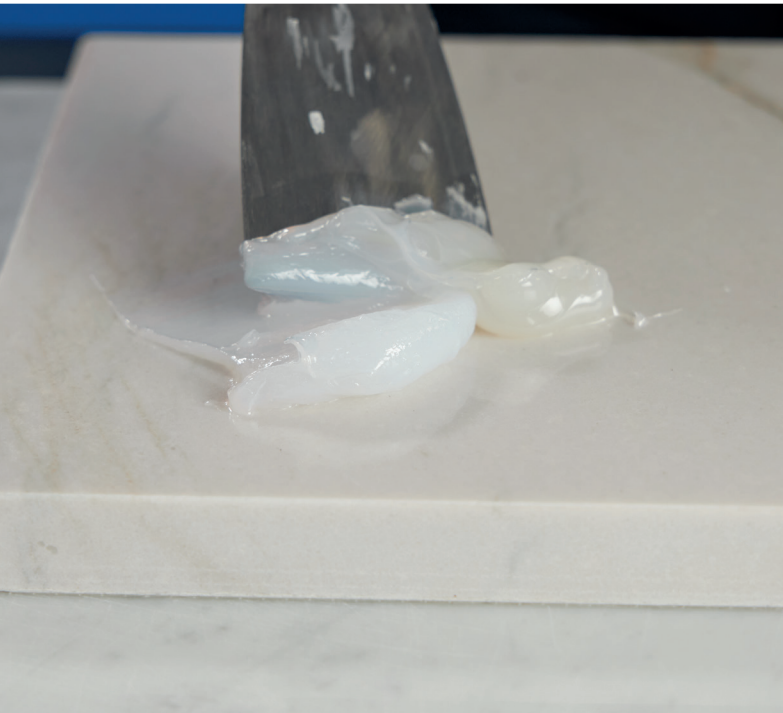

Mixing



Post mix verticality



Mixed product appearance



Hardened product appearance